


NADYTM AUDIO

OWNER'S MANUAL

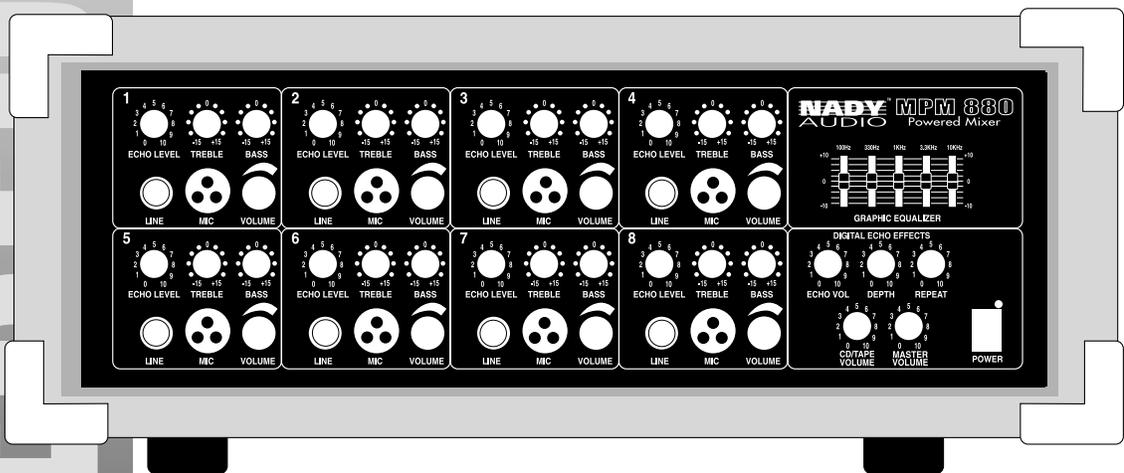


MPM 880

8-CHANNEL POWERED MIXER

POWERED MIXER

MPM 880

8-CHANNEL POWERED MIXER

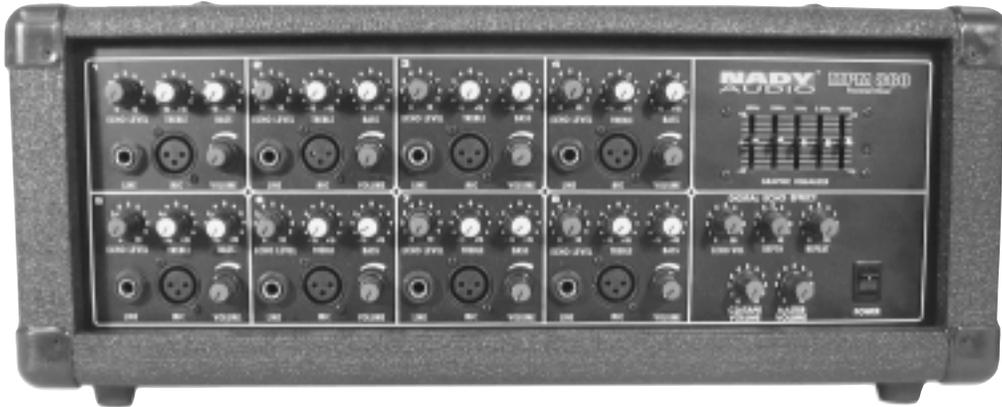

Congratulations on your choice of powered mixers — you have purchased one of the finest powered mixing consoles on the market today. This unit was developed using the expertise of professional sound engineers and working musicians. You will find that your new NADY AUDIO MPM 880 has superior performance and greater flexibility than any other powered mixer in its price range. Please read this manual carefully to get the most out of your new unit.

Thanks for selecting NADY AUDIO as your choice in powered mixing consoles.

FEATURES

The rugged MPM 880 is ideal for many applications and includes a mixer, equalizer, digital effects unit and power amp—all in a lightweight, compact, portable and simple-to-operate unit.

- 8 mono inputs, both balanced XLR MIC IN (with +15 V phantom power) and 1/4" unbalanced LINE IN
- Rear panel CD/TAPE RCA jacks for additional 5th music source (stereo) input with separate volume control
- 2 speaker output jacks—80W peak music power @ 8 Ω each (100 W @ 4 Ω) with separate output power amplifiers
- Built-in digital echo/reverb
- Volume, bass, treble, and delay gain controls for each channel
- Master section with CD/Tape volume, master volume, and digital echo/reverb volume, depth and time (echo repeat) controls, and 5-band Master EQ
- Rear panel Send and Return effects loop jacks for external effects
- Convection cooling for quietest operation
- Voltage select switch for operation at either 115 or 230 VAC
- Weighs 24.05 lbs (10.93 Kg)

CONTENTS

Features	2
Warning.....	3
Controls and Connections	4
Specifications	6

Date of Purchase _____

Dealer's Name _____

City _____

State _____ Zip _____

Model # _____

Serial # _____

WARNING



An equilateral triangle enclosing a lightning flash/arrowhead symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure which may be of sufficient magnitude to constitute a risk of electric shock.




An equilateral triangle enclosing an exclamation point is intended to alert the user to the presence of important operating and service instructions in the literature enclosed with this unit.

IMPORTANT SAFETY INSTRUCTIONS

When using this electronic device, basic precautions should always be taken, including the following:

1. Read all instructions before using the product.
2. Do not use this product near water (e.g., near a bathtub, washbowl, kitchen sink, in a wet basement, or near a swimming pool, etc.).
3. This product should be used only with a cart or stand that will keep it level and stable and prevent wobbling.
4. This product, in combination with headphones or speakers, may be capable of producing sound levels that could cause permanent hearing loss. Do not operate for a long period of time at a high volume level or at a level that is uncomfortable. If you experience any hearing loss or ringing in the ears, you should consult an audiologist.
5. The product should be positioned so that proper ventilation is maintained.
6. The product should be located away from heat sources such as radiators, heat vents, or other devices (including amplifiers) that produce heat.
7. The product should be connected to a power supply only of the type described in the operating instructions or as marked on the product. Replace the fuse only with one of the specified type, size, and correct rating.
8. The power supply cord should: (1) be undamaged, (2) never share an outlet or extension cord with other devices so that the outlet's or extension cord's power rating is exceeded, and (3) never be left plugged into the outlet when not being used for a long period of time.
9. Care should be taken so that objects do not fall into, and liquids are not spilled through, the enclosure's openings.
10. The product should be serviced by qualified service personnel if:
 - A. The power supply cord or the plug has been damaged.
 - B. Objects have fallen into, or liquid has been spilled onto the product.
 - C. The product has been exposed to rain.
 - D. The product does not appear to operate normally or exhibits a marked change in performance.
 - E. The product has been dropped, or the enclosure damaged.
11. Do not attempt to service the product beyond what is described in the user maintenance instructions. All other servicing should be referred to qualified service personnel.

CONTROLS & CONNECTIONS

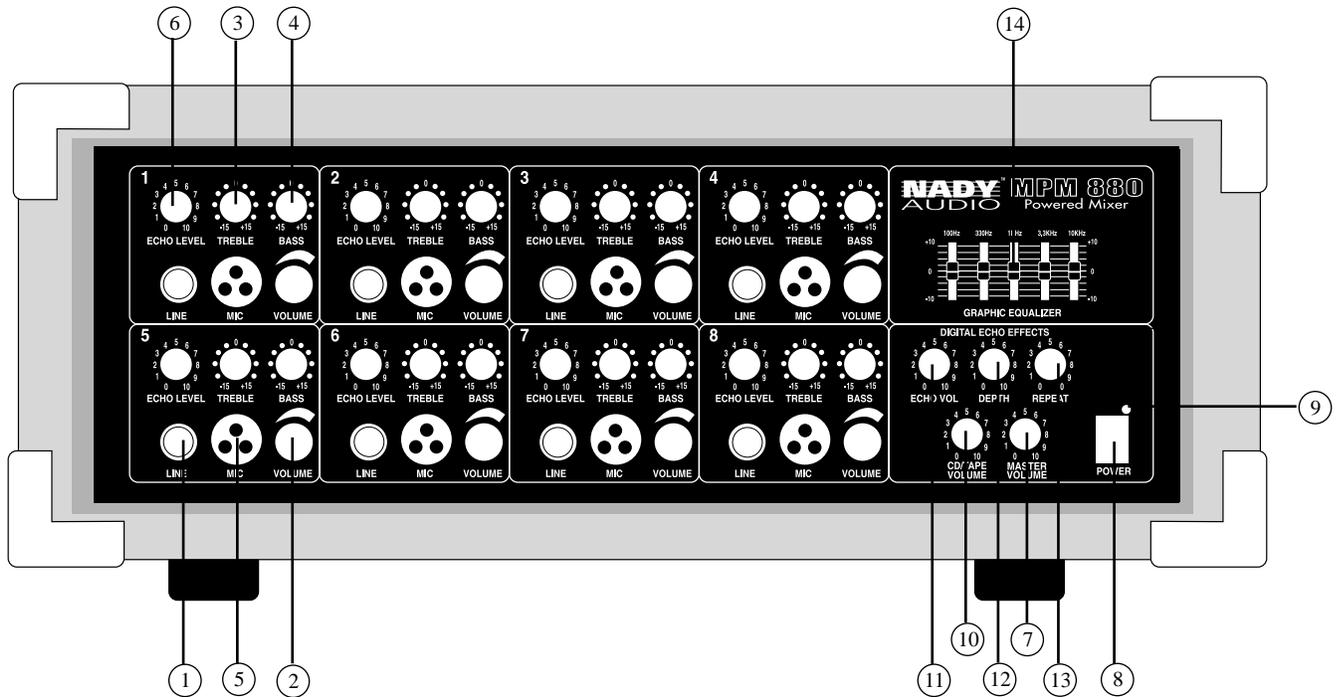

FRONT PANEL

Note: 1 through 6 below are referenced to Channel 1 & 5. The other 6 Channels are identical.

1. LINE INPUT

1/4" (6.3mm) unbalanced jack for a mono signal line level input

2. CHANNEL VOLUME CONTROL

Adjusts the channel output level

3. TREBLE CONTROL

Adjusts the amount of treble in the signal with cut/boost range of ± 15 dB

4. BASS CONTROL

Adjusts the amount of bass in the signal with cut/boost range of ± 15 dB

5. MIC INPUT

Balanced XLR input jack [Pin 1 = Ground, Pin 2 = Hot (+), Pin 3 Cold (-)]. Phantom power of +15V is always applied between Pin 2 and Pin 1 for use with condenser microphones.

6. ECHO LEVEL CONTROL

Controls the amount of echo/reverb in the channel signal

7. MASTER VOLUME CONTROL

Adjusts the level of the master signal. If the Send/Return effects loop is connected to an external effects device, that unit's level controls will determine the final volume [see also RETURN JACK (15) below]

8. POWER SWITCH

Turns the unit ON or OFF. Always turn level controls down before turning on the unit.

9. POWER ON LED INDICATOR

Indicates when the amplifier is ON.

10. CD/TAPE VOLUME CONTROL

Adjusts the level of the signal input to the stereo CD/TAPE RCA jacks (17) in the output master signal.

11. ECHO VOLUME CONTROL

Adjusts the level of the digital echo effects volume in the output master signal.

12. DEPTH CONTROL

Adjusts the amount of depth in the echo signal. Turning this control clockwise changes the echo/reverb effect in a manner similar to increasing the size of a room in which you are getting natural echo/reverb. Experiment to find desired effect.


13. REPEAT CONTROL

Adjusts the length and number of repeats in the echo signal. At "0" you will get a single echo with depth determined by the setting of the Depth control (12). As you adjust the control clockwise toward "10", you will get an increasing number of repeats for a longer time and also the interval between repeats will widen. Experiment to find desired effect.

14. GRAPHIC EQUALIZER

Adjusts the overall audio output signal in 5 bands (100Hz, 330Hz, 1KHz, 3.3KHz, 10KHz). This equalizer is an extremely flexible and versatile setup of tone controls. It can shape the response of the sound system to suit almost any location. You can boost or cut each equalizer band by ± 10 dB. Be careful when using the EQ as you can distort your sound and even damage your speakers with excessive equalization.

CONTROLS & CONNECTIONS

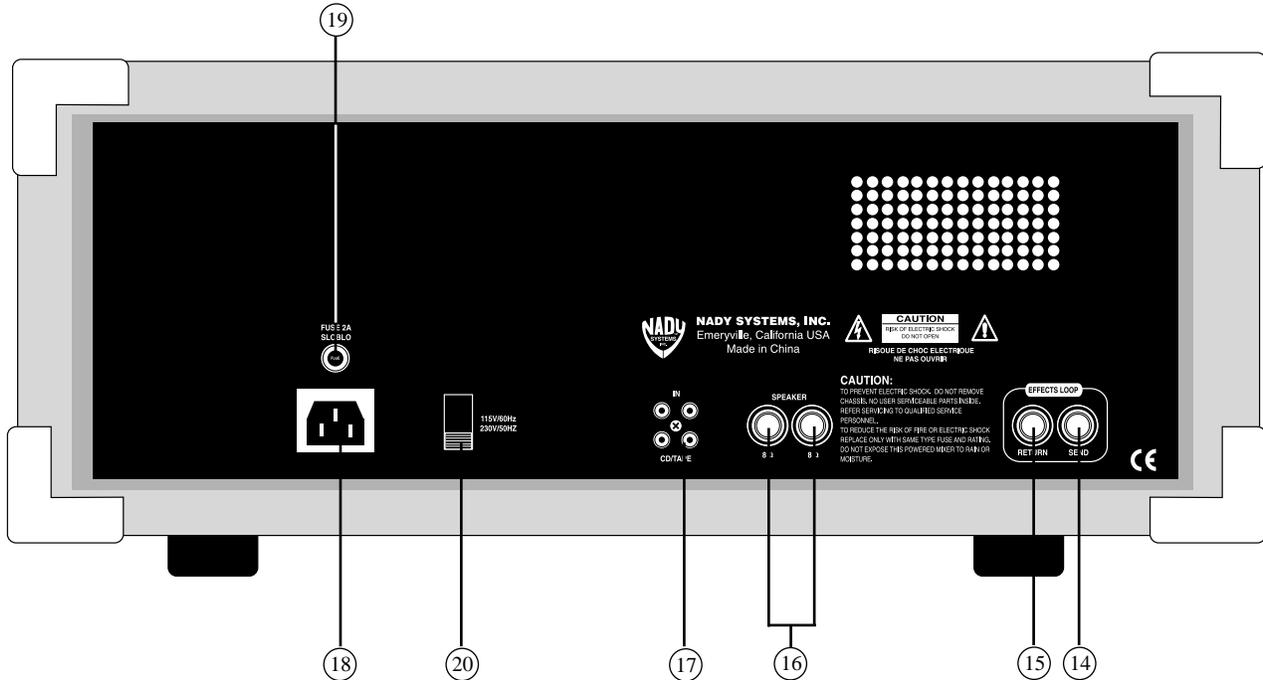

REAR PANEL

14. SEND JACK

1/4"/6.3mm TS phone jack. Connects the MPM 880 to the input of the external effects unit. The Send/Return effects loop utilizes the signal from the master mixer and is before the amplifier. Normally, with no plug in the Send jack, this master signal is routed straight through to the amplifier. If a plug is connected to the Send jack, it will interrupt the master signal, and the signal must be routed back through the Return jack (after processing by the external effects device) or there will be no signal to the amplifier. When using the Send/Return effects loop, set the final volume of the MPM 880 with the output level control of the effects device being used.

15. RETURN JACK

1/4"/6.3mm TS phone jack. Connects the MPM 880 to the output of the external effects unit. The volume of the MPM 880 is controlled by the level input to the return jack, which is just before the amplifier, and so is adjusted by the volume control of the effects device being used in the Send/Return effects loop.

16. MONO SPEAKERS OUTPUTS

Two 1/4" (6.3mm) jacks, each powered by its own separate amplifier output stage, for connecting one or two 8 Ω speaker cabinets.

CAUTION: Do not overload the MPM 880 with speaker loads less than 4 Ω as this will degrade performance and may harm the unit.

17. CD/TAPE JACKS

Two RCA jacks for inputting a stereo signal from a tape or CD source. This signal is mixed into the master signal with the **CD/Tape volume control (10)**. Although the input signal may be

stereo, it will be automatically mixed into a mono signal for amplification by the MPM 880, so relative balancing of left and right signals must be done by the stereo level controls of the source output. This CD/Tape input is, in effect, a ninth input to the MPM 880 and allows added flexibility in mixing in external music sources.

18. POWER CORD CONNECTOR

This standard IEC receptacle is used to connect the AC power source to your powered mixer. Power requirements: 115VAC or 230VAC (see 20 below)

19. FUSE HOLDER

When the fuse blows, replace it with the same type fuse, size and power rating (see **SPECIFICATIONS**). If it continuously blows, stop using the unit and have it serviced by qualified personnel.

20. VOLTAGE SELECTOR SWITCH

For selecting the proper voltage (115/230VAC) to match the power supply in your area.

SPECIFICATIONS

Output Power	80W music peak power at 8Ω, 100W at 4Ω, each speaker output
Frequency Response	30Hz-13KHz +/-3dB
Total Harmonic Distortion (THD) + Noise	< 0.85%
Inputs (max. sensitivity/impedance)	8 X MIC: 6mV / 1KΩ 8 X Line: 60mV / 15KΩ 1 X Return: 800mV / 15KΩ 4 X CD/TAPE: 300mV / 25KΩ
Outputs (max.out/impedance)	1 X Send: 850mV / 100K
Output Equalization	±10dB, 5 bands at 100Hz, 330Hz, 1KHz, 3.3KHz, & 10KHz, cut and boost
Phantom Power	+15VDC, all channel MIC inputs (XLR, from Pin 2 to Pin 1)
Power Supply	115 (60Hz) / 230 (50Hz) VAC, selectable
Fuse	2 A / 250 V 5 x 20mm, glass type, slow blow
Dimensions	20.0" X 8.25" X 11.1" (50.8 X 20.9 X 28.2 cm)
Weight	24.05 lbs (10.93 Kg)

The specifications above are correct at the time of printing of this manual. For improvement purposes, all specifications for this unit, including design and appearance, are subject to change without prior notice.

SERVICE FOR YOUR NADY AUDIO PRODUCT

(U.S.) Should your NADY AUDIO product require service, please contact the Nady Service Department via telephone at (510) 652-2411, or e-mail at service@nadywireless.com.

(International) For service, please contact the NADY AUDIO distributor in your country through the dealer from whom you purchased this product.

DO NOT ATTEMPT TO SERVICE THIS UNIT
YOURSELF AS IT CAN BE DANGEROUS
AND WILL ALSO VOID THE WARRANTY.

